

SNDT Women's University

1, Nathibai Thackersey Road,
Mumbai 400 020
Phone: +91 22 2203 1879
Fax: +91 22 2201 8226



श्रीमती ना. दा. ठाकरसी विद्यापीठ
१, नाथीबाई ठाकरसी मार्ग
मुंबई ४०० ०२०
Telegram: UNIWOMEN
Website: sndt.ac.in

Estate Dept./2022-23/509

February 22nd, 2023

SUB: Quotation for Repair & renovation of work for Economics Dept. at 4th floor in Annex building at S.N.D.T. Women's University, Churchgate Campus.

Madam/Sir,

Sealed quotations are invited for Repair & renovation of work for Economics Dept. at 4th floor in Annex building at S.N.D.T. Women's University, Churchgate Campus. Interested authorized vendors are supposed to submit their quote along with their detail profile in the format given in "Annexure A" on their company letter head. Quotation should be submitted to the office of "The Registrar" at Churchgate campus on or before **06 March 2023** Contractor should submit their quotes in **two envelopes** enclosed in single envelope along with Technical bid envelope & financial bid envelope. Subject should be mentioned on each envelop.

Envelop may contains following documents in respective envelop:

A) Technical Bid

- i. Profile of the vendor
- ii. Work Experience Certificate from the concerned the organization where work has been executed.
- iii. GST Certificate
- iv. PAN Copy
- v. If GST is not applicable then declaration of the same.
- vi. If GST is applicable, then No Dues Certificate authorized by a Chartered Accountant


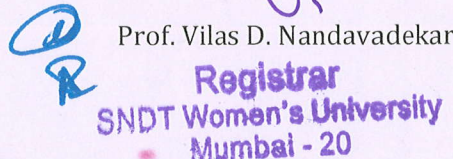
B) Financial Bid

- vii. Mentioning including all taxes
- viii. If required work is mentioned component wise then the amount is to be given component wise in the prescribed format.

Quotation should be submitted in closed envelop and on top write the subject. As mentioned in the notification.

The University reserves the right to reject any or all quotations without assigning any reasons thereof.

Regards,


Prof. Vilas D. Nandavadekar

Registrar
SNDT Women's University
Mumbai - 20

(Offer should filled on letter head)
Annexure A

To,

The Registrar,
SNDT Women's University,
Churchgate, Mumbai

Sub: Quotation for Repair & renovation of work for Economics Dept. at 4th floor in Annex building at S.N.D.T. Women's University, Churchgate Campus.

Respected Madam/Sir,

With reference to subject cited above we would like to furnish our quote with best rate possible as below:

Sr. No.	Description of work	Qty.	Unit	Rate	Amount
1	Removing doors and windows with frames and stacking the materials as directed with all leads, lifts etc. complete.	3.00	No		
2	Removing W.C. pans including disconnecting the sanitary and water supply connections, removing and breaking flooring and bed con-crete around pan removing the same carefully and stacking the serviceable materials as adn where directed including throwing the unserviceable materials out side etc. carefully and throwing out the refusal outside etc. complete.	2.00	No		
3	Removing urinal pans or wash hand basins with frame including disconnecting the sanitary and water supply connections, removing the same carefully and stacking the serviceable materials as and where directed including throwing the unserviceable materials outside etc complete	2.00	No		
4	Dismantling brick masonry in Mud and stacking the materials as directed with all leads, lifts etc. complete.	1.44	Smt.		
5	Removing cement tiles, or marble or polished shahabad floor or dado without bed concrete including stacking the materials as directed with all leads, lifts etc. complete	89.47	Smt.		
6	Removing brick bat coba including stacking the spoils as directed with all leads, lift etc, complete.	0.47	Cmt.		

7	Removing the existing cement plaster of any thickness without causing dust nuisance and stacking the debris upto a distance of 50 metres or spreading in the compound and cleaning the site etc. complete. Note: Following items to be executed after prior approval of Superintending Engineer.	81.92	Smt.		
8	Providing second class Burnt Brick masonry with conventional/ I.S. type bricks in cement mortar 1:6 in superstructure including striking joints, raking out joints, watering and scaffolding etc. Complete	2.46	Cmt.		
9	Providing water proofing in W.C. and bath including brick bat coba in all position including providing and laying 12 mm bedding in cement mortar 1:3 over concrete slab with waterproofing compound @ 1 Kilogram / per bag of cement lay in brick bat coba of required thickness in cm 1:5 with water proofing compound 1 Kilogram/bag of cement grouting and finishing the top layer with 20 mm thick brick bedding in cement mortar 1:3 with water proofing compound 1 Kilogram / per bag of cement and testing the treated Portion for 48 hours by pond test and covering ten year's guarantee on requisite stamp paper including curing etc. complete.	0.47	Cmt.		
10	Providing waterproof plaster in W.C. and bath 12 mm thick for dado in cement mortar 1:3 with neat finishing, floating using waterproofing compound at the rate of 1 kg. per bag of cement of approved make and manufacturer and curing etc. complete. (Excluding Tiles) (As directed by Engineer in Charge)	22.25	Smt.		
11	Providing internal cement plaster 12mm thick in single coat in cement mortar 1:3 without neeru finish to concrete or brick surfaces, in all position including scaffolding and curing etc. complete.	81.92	Smt.		
12	Providing and applying Two coats of wall care Putty on plastered surface and Ceiling and Walls to prepare surface even and smooth of approved	81.92	Smt.		
13	Lowering down the debris obtained from breaking and removing the cement plaster/burnt brick masonry of the first floor by any means without causing dust nuisance and damage to structure, stacking the same as and where directed including cleaning the site complete.	9.50	Cmt.		
14	Providing and laying vitrified mirror / glossy finish tiles decorative type having size 590 mm to 605 mm x 590 mm to 605 mm of 8 to 10 mm thickness and conforming to IS. 15622-2006 (group Bla) of approved make, shade and pattern for flooring in required position laid on a bed of 1:4 cement mortar including neat cement float, filling joints, curing and clearing etc. complete.	59.76	Smt.		

15	Providing and laying Antiskid Ceramic tiles of approved quality of size 30 cm x 30 cm and confirming to IS 15622-2006 (Group-B IIA) for antiskid flooring in required position laid on a bed of 1:4 cement mortar including cement float, filling joint with cement slurry cleaning curing etc. complete.	3.13	Smt.		
16	Providing and laying vitrified mirror / glossy finish tiles having size 590 mm to 605 mm x 590 mm to 605 mm of 8 to 10 mm thickness and confirming to IS. 15622-2006 (group Bla) of approved make, shade and pattern for flooring in required position laid on a bed of 1:4 cement mortar including neat cement float, filling joints, curing and clearing etc. complete.b) Skirting	4.33	Smt.		
17	Providing and laying ceramic tiles having size 30 cm. x 45 cm. confirming to corresponding I.S. for dado and skirting in required position with readymade adhesive mortar of approved quality on plaster of 1:2 cement mortar including joint filling with white/ colour cement slurry cleaning curing etc. complete.	22.25	Smt.		
18	Providing and laying telephone black / Amba White / Cadburybrown / Ruby red / Ocean Brown granite stone of 18 to 20 mm thick for door frame/ dado/ window boxing etc. On C.M. 1:6 including filling joints with polymer base filler nosing the sharp edges wherever necessary, curing, etc. complete.	3.41	Smt.		
19	Providing and fixing European type white glazed earthenware water closet pan with UPVC seat and lid with chromium plated brass hinges and rubber buffers including UPVC and vent pipe up to the outside face of wall 10 litre enameled low level flushing cistern with fittings pipe stop tap brackets for fixing cistern 32 mm dia. UPVC flush pipe with fittings and clamps ,20 mm dia.UPVC overflow pipe ,mosquito proof couplings G.I. chain and pulley,with water Jet and fitting including cutting and making good to the walls and floors testing etc. complete.(prior approval of sample and brand by Ex. Engineer is necessary before use)	2.00	No		
20	Providing and fixing Coloured glazed with bottle trap earthenware Wash Hand Basin of 55x40 cm. size including cold water piller taps, brackets, rubber plugs and brass chain, stop tap, chromium plate bottle trap and necessary pipe connections including UPAC waste pipe and trap upto the outside face of the wall, making good the damaged surface, testing etc. complete. (BRAND - HINDWARE/ JOHNSON/PARRYWARE/ VIENA/ AMERICAN STANDARiv)	1.00	No		
21	Providing and fixing 15 cm rigid PVC Nahani trap including PVC grating ,bend,connectingpiece of UPVC pipe up to the outside face of wall ,making the good damaged surface and testing etc. complete (Prior approval of sample and brand by Ex. Engr. is necessary before use)	2.00	No		

22	<p>Storage Full Height: Providing & fixing 53 cm deep cupboard type storage Unit made of 19 mm thick marine plywood of the requisite manufacture generally confirming to I.S. 710-1980 for frmaes, internal verticals horizontal divisions, shutter & 6 mm & 12 mm thick marine plywood for drawers with locks, handles, hardware, lipping & beading patti (BTC) etc. The shall be finished with veneer in approved pattern with grooves etc. & two coats of french polish & melamine polish for all BTC modulng & lipping patties with antitermite treatment to plywood & wood work with ten years guarantee on requisite stamp paper including all leads & lifts etc. complete as per drawing and instruction of Engineer-in-charge etc. complete</p>	14.65	Smt.		
23	<p>Low Height Storage: Providing & fixing 40 cm deep Deep Low Height Storage Unit at require location less than 1.35 meter height by using 19 mm thick marine ply of requisite manufacture generally confirming to I.S. 303/IS.710-1980 for frmaes, internal verticals horizontal divisions, shutter & 6 mm thick marine ply back, with necessary locks, handles, hardware, lipping (BTC) modulng etc. The total shall be finished with formica laminate sheet finished lamination pattern with grooves externally & two coats of french polish & melamine polish for all BTC modulng & lipping patties with antitermite treatment to plywood & wood work with ten years guarantee on requisite stamp paper including all leads & lifts etc. complete as per Architect's drawing and instruction of Engineer-in-charge etc. complete</p>	12.89	Smt.		
24	<p>Table (1.20X0.60) : Providing & Fixing in position table for the Clerical Staff having overall size of 120x60x76 cm height made out of 19 mm thick Marine Ply of the requisite manufactrure generally confirming to I.S.303/I.S.710-1980 top, vertical side & 6 mm marine plywood of reuisite manufacture generally confirming to side and 6 mm marine ply bottom eith necessary sliders one open shelf of 19 mm thick marine ply with necessary lipping on external side and foot rest out of 40x75 mm (finished dimension) CPTW ect. as per drawing and instructions. the external side and top shall be finished with 1 mm thick laminate matt/suede.fine line finished surface on table and drawer shall be internally finished with two coats of french polish with antitermite treatment.</p>	5.89	Smt.		

25	Conference Table : Providing & Supplying in Position Conference table of (overall size of 2.40x0.60x0.76 m height) made out of 19 mm thick Marine Ply of the requisite manufacture generally confirming to I.S.303/I.S.710-1980 top, vertical side, apron, mid supports, shelves etc. including elevation treatment on front side, exposed sides shall be finished with 1 mm thick laminate matt/suede/fineline finished lamination pattern with grooves all internal surface shall be finished with french polish with antitermite treatment CPTW foot rest of 75 mm x 40 mm (Finished size) shall be provided at suitable height all melamine polished antitermite treatment to plywood and wood work with ten year guarantee bound etc. including and instructions of Engineer-in-charge etc. complete.	1.44	Smt.		
26	Partition : P/F low height partitions at requisite location having minimum 65 mm thick made by using 50 x 50 mm (finished size) Centrally Providence Teak Wood (CPTW) section framing at 600 mm center to center, covered with 6 mm marine ply requisite manufacture generally confirming to I.S.303/I.S./710-1980 on both side. The partition shall be finished with formica lamination sheet finished lamination pattern with or without grooves externally with necessary lipping (Bourmah Teak wood) moulding antitermite treatment to all plywood and wood work including all leads and lifts etc. complete as per Architect drawing & instruction of the Engineer-in-charge.	5.46	Smt.		
27	Removing any kind of debris including loading in truck and conveying to dumping point approved by MCGM, unloading spreading etc. complete. With all leads and lifts.	13.500	Cmt.		
28	Providing & fixing 12mm thick toughened etched glass as per the design	2.53	Smt.		
	Total				
	Taxes will be paid at actual at the prevailing time.				
	Net Total				